

Telecom/IT Battery Systems

AGV Battery Systems

Motive Power Systems

Railway Battery Systems

Power Supply

Standby

power.com SB

Sealed lead-acid battery



Product features

⇔ customer benefits

- Electrolyte fixed in glass mat
 - ⇔ no maintenance
 - ⇔ horizontal operation (option)
- Protection against flashback and central degassing integrated in the lid
 - ⇔ Enhanced protection against risk of explosion
- Smooth battery lid with integral handle
 - ⇔ easy-to-clean surface
 - ⇔ easy to handle
- Composite terminal / system connector
 - ⇔ no corrosion
 - ⇔ prevents short-circuits even during installation


Applications

- Security Lighting
- IT/Telecom
- Power Supply

power.com SB Type Overview

Capacities, Dimensions and Weights

Type	$C_{10}/1.80\text{ V}$ Ah	$C_{1/2}/1.75\text{ V}$ Ah	$C_{1/4}/1.70\text{ V}$ Ah	$C_{1/6}/1.60\text{ V}$ Ah	Weight kg	Length L mm	Width W mm	Height H mm
power.com SB 12V 50	52.7	33.8	27.5	25.4	26.0	229	177	230
power.com SB 12V 60	63.2	40.6	33.0	30.5	26.5	229	177	230
power.com SB 12V 80	80.4	51.6	42.0	38.8	37.5	344	177	230
power.com SB 12V 100	94.8	60.9	49.5	45.7	38.0	344	177	230
power.com SB 12V 110	111.1	71.4	58.0	53.6	52.0	498	177	230
power.com SB 12V 130	128.9	82.8	67.3	62.2	52.5	498	177	230
power.com SB 12V 140	142.2	91.4	74.2	68.6	54.5	498	177	230

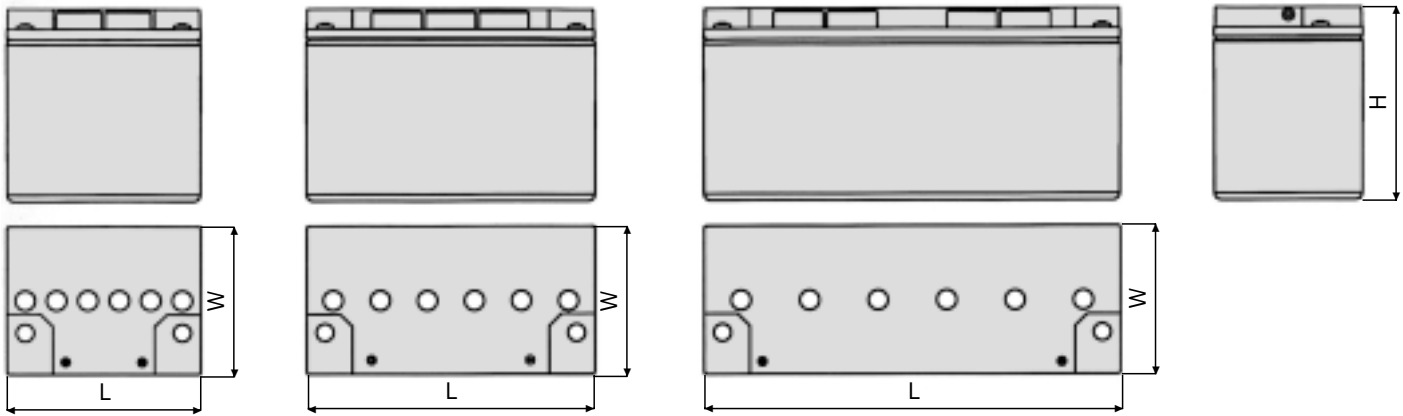

power.com SB 12V 50 - power.com SB 12V 80 -
power.com SB 12V 60 - power.com SB 12V 100

power.com SB 12V 110 -
power.com SB 12V 140

Life expectancy: > 12 years (acc. to EUROBAT)

Sales and Administration
HOPPECKE Batterien GmbH & Co. KG
 P.O.Box 1140 · D-59914 Brilon
 Bontkirchener Straße 1 · D-59929 Brilon-Hoppecke
 Phone + 49 29 63 61-3 74 · Fax + 49 29 63 61-2 70
 www.hoppecke.de · info@hoppecke.com

 **HOPPECKE**
POWER FROM INNOVATION